



MACHINE-TOOL PLANT **SASTA**

LATHE PRODUCTION EXPERT



# METAL CUTTING MACHINES



## CONTENTS

Company's history	6
Sasta today	8
Research and development department	10
Foundry	12
Machining workshop	14
Assembling	16
Lathes for moderate cutting duty	20
Pipe-threading (oil country) lathes	38
Heavy duty lathes with straight-through carriages	44
Conventional milling and lathe machines	50
Vertical lathes	52
Casting and machining for customers	58
Renishaw measuring systems	60
Workpieces measuring systems for CNC lathe machines	61
Machine service maintenance and the customer's personnel training	62







MACHINE-TOOL PLANT **SASTA**

**Sasta is one of the largest operating machine tool factories on the territory of Russia. The main activity of modern Sasta is a full cycle production of metal cutting machines: from designing and casting to final assembly.**



We have our own design bureau, which has been developing and implementing new machine models for more than 45 years. The foundry with testing laboratory provides production of the main machine units and body parts. The blanking shop is equipped with the most advanced facilities. The factory machinery comprises more than 200 units, including unique equipment.

Today machine tool factory Sasta produces 6 main groups of metal cutting equipment: horizontal lathes, slant bed lathes, lathes with straight-through carriages, turning and milling machining centers, pipe-threading (oil country) lathes, vertical lathes.

We are also gradually performing modernization and technical re-equipment of our own production site, because manufacturing of modern,

accurate and reliable machines is possible only when each of its components is made strictly according to quality control requirements and advanced technology.

**Sasta merged with Baltiyskaya Promishlennaya Kompaniya (BPK), JSC.** Sasta brand machines work in all regions of Russia from Kaliningrad on West to Sakhalin on East, in CIS countries and all over the world: in North and South America, Europe, Asia, Africa and Australia.

Today our metal cutting equipment successfully works at Heavy Engineering, PowerGen, Aerospace, Defense, Shipbuilding and Transport industries.



# COMPANY'S HISTORY

- 1971 Factory construction start.
- 1974 Factory first facility run.
- 1975 First machines release.
- 1976 Commissioning of the first automatic line. Production of the first machines with cycle and CNC system.
- 1979 Pipe-threading machines plant was put into operation. Start of the pipe threading machines production. Development of the first model designed for oil and gas industry.
- 1981 Production of 588 metal cutting machines and 4 automatic lines.
- 2003 Production of the first turning machining center. Commissioning of the foundry equipped with the most advanced machinery.





MACHINE-TOOL PLANT SASTA



- 2012 Start-up of the new automatic line designed for the processing of body parts by means of two horizontal boring machining centers with transport system for 50 pallets.
- 2013 Introduction of lathes with straight-through carriages, which allow machining of long shafts over the total length within one setting.
- 2017 Vertical lathes production start. Presentation of a new model of the multifunctional turning and milling center HT500.
- 2018 Technical reequiptment and modernization of production facilities.
- 2019 The resumption of export sales, participation in the international show "EMO-2019", Hanover (Germany).
- 2020 Release of new machine models: multi-process turning center with carriage crossing and Y axes; FLEX lathes with a cycle CNC system "for all users".





# SASTA TODAY

Machine tool factory Sasta is a Russian enterprise with half-century of existence, which preserved and inherited the best traditions of the Soviet machine building industry. Machines produced by Sasta have proved themselves as quality and reliable equipment known throughout the world. Equipment made by Sasta is supplied to machine building enterprises in Russia and is exported as well.

Sasta is one of few enterprises who managed to keep production culture, technical potential, engineering and working staff through the tough times.

**The main activity of modern Sasta is a full cycle of metal cutting machines production: from designing and casting to final assembly.**





MACHINE-TOOL PLANT SASTA



The Factory has all technological areas necessary for full cycle production.

The factory production facilities are more than 75,000 m<sup>2</sup>.

The enterprise technical capabilities allow to produce machines of any complexity:


- horizontal lathes;
- flat bed lathes;
- turning and milling machining centers;
- lathes;
- vertical lathes;
- slant bed machines;
- pipe-threading machines.

Accuracy and reliability of Sasta products are ensured by a closed production cycle: the most important machine components are produced and processed directly at the factory.





# RESEARCH AND DEVELOPMENT DEPARTMENT

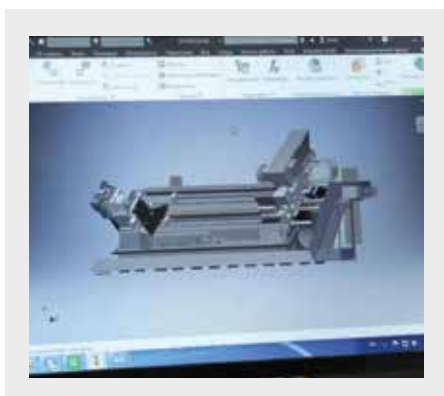

The research and development department has been operating on the basis of the machine tool factory Sasta for more than 40 years. Meanwhile a product line of reliable and high-quality metal cutting equipment was developed and successfully introduced within the walls of multiple domestic and foreign factories. Products of the factory are being used at enterprises belonging to defense industry, machine building complex, oil and gas industry and are being exported to 39 countries.





MACHINE-TOOL PLANT **SASTA**




All machines of Sasta model range are developed by own R&D department.

The R&D department performs a full cycle of design activities:

- development of technical specifications;
- development of mechanical components: beds, headstocks, carriage groups, etc.;
- development of hydraulic and pneumatic control systems;
- development of cover and safety protection;
- development of electrical equipment for machine tools.

The machines are elaborated involving modern design solutions and by means of advanced technologies well known in the world machinery engineering.

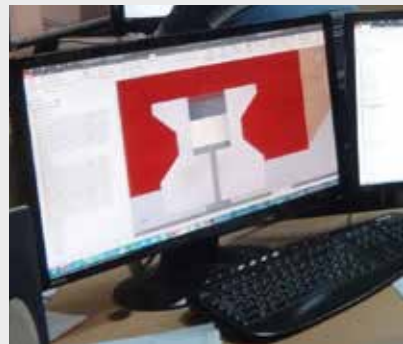





# FOUNDRY

One of the most important advantages of Sasta is its own foundry, possessing technological flexibility, as well as the ability to manufacture cast iron in single or batch production.

The foundry was opened in 2003. The design capacity is 250 tons of cast iron per month.

The sites of the foundry are equipped with modern melting equipment:

- induction melting units INDUCTOTHERM;
- IMF forming equipment, using the third generation high-speed mixers and mechanical regeneration of the molding mixture;
- automated line of moldless molding.

The implemented technology based on cold-hardening mixtures allows obtaining molds of high dimensional accuracy, which makes it possible to produce any castings with minimal allowances for machining.

Finished casting has a high surface quality without metallized and chemical fumes.

## Thermal section:

Thermal section is equipped with new electric furnace with rolling out heater.

- Working chamber dimensions: 9000x2500x2000 mm;
- Maximum heating temperature: 1250 ° C
- Maximum cage weight: 18000 kg



### Industrial laboratory

The laboratory includes the following units:

- spectral laboratory;
- mechanical laboratory;
- metallographic laboratory;
- mixture laboratory;
- chemical laboratory.

The sites are fitted with special equipment which allows carrying out all necessary types of control: from the analysis of incoming materials to the control of melt chemical composition and microstructure of castings.

Qualified personnel performs control of castings at different production stages, including test works and metrological supervision.







# MACHINING WORKSHOP



The machine tool factory Sasta performs machining of its own casting – complex body parts for the metal cutting equipment production.

The factory stock comprises more than 200 machines, including the following unique equipment:

- automatic line Toyoda, consisting of two Toyoda FA800S machining centers, with the possibility of continuous uninterrupted operation for 72 hours without operator's involvement. The line includes work-piece feeding system consisting of 50 interchangeable pallets and automatic tool changing system for 330 tools;
- 5-axes portal machining center Micromat, designed to handle large parts with a high precision. Precision accuracy is provided by the temperature control system at the main machine components;





MACHINE-TOOL PLANT **SASTA**



- cylindrical grinding machine Studer for spindle units final machining;
- horizontal milling centers with CNC;
- double-column machining centers;
- surface-grinding machining centers;
- planing machines;
- internal grinding equipment;
- gear milling machines and gear grinding machines;
- turning machining centers;
- milling machining centers;
- waterjet and laser machines;
- rolling-and-bending equipment including 4-roll hydraulic bending machine;
- own-produced equipment: turning and turning-milling centers Sasta.

**Currently the plant is conducting technical production re-equipment:** the production capacity is expanded due to the introduction of modern high-tech equipment, measuring and control devices, which, in its turn, ensures an uninterrupted production cycle and efficiency growth.





# ASSEMBLING



Assembling areas:

- component assembly;
- electric wiring assembling;
- general machines assembling area;
- coating area;
- testing and after-sales training;
- packing.

Within the assembly cycle Sasta specialists perform function testing of each machine during 96 hours.

The factory facilities allow assembling of any equipment including heavy-duty and large-sized machines.





MACHINE-TOOL PLANT **SASTA**









MACHINE-TOOL PLANT SASTA

## MACHINES MODEL RANGE

- LATHES FOR MODERATE CUTTING DUTY
- LATHES FOR HEAVY CUTTING DUTY
- PIPE THREADING (OIL COUNTRY) LATHES
- HEAVY DUTY LATHES WITH STRAIGHT-THROUGH CARRIAGES
- CONVENTIONAL MILLING AND LATHE MACHINES
- VERTICAL LATHES

# LATHES FOR MODERATE CUTTING DUTY

FLEX lathes with a cycle CNC system “for all users”

## CA500 FLEX



### Main advantages

- The machine is balanced by characteristics with a very strong construction.
- Rigid construction: rigid solid-cast bed, wide v-guides, five precision radial-axial bearings in the spindle unit, feeds servo-drives and ball screws instead of mechanical kinematic relations, – all this ensures accuracy and reliability of the machine.
- The ability to upgrade a cycle control system to a full Fanuc CNC system without additional installation work, only by entering a service code.
- Handles for work as the universal machine.



Technical specification	CA500
<b>CUTTING AREA</b>	
Max. diameter of the workpiece to be installed over bed, mm	500
Max diameter of the workpiece to be processed , mm over bed	350 (500)
Max diameter of the workpiece to be processed , mm over carriage	250
Length of the workpiece installed in the centers, mm	1000
Length of the workpiece processed in the centers, mm	880
Max. weight of the workpiece installed, kg in chuck	300
Max. weight of the workpiece installed, kg in centers	2000
<b>SPINDLE</b>	
Spindle speed, rpm	20 - 3500
Speed adjustment	Stepless at 2 ranges
Main motor power,kW	15/18,5
Max. torque, Nm	797/997
Chuck diameter, mm	250 (315, 400)
Spindle nose according to DIN55026	A6
Spindle bore, mm	55
<b>RAPID FEED</b>	
X rapid feed, mm/min	5000
Z rapid feed, mm/min	1-4000
<b>FEED</b>	
X cutting feed range, mm/min	1-2000
Z cutting feed range, mm/min	1-4000
Cut thread stroke limit, rpm	0.5-150
Feed speed adjustment	Stepless
<b>TOOLHOLDER</b>	
Number of tools	4 (8)
Tool section, mm	25x25
Tool change	Manual (automatic)
<b>TAILSTOCK</b>	
Quill travel, mm	200
Quill diameter, mm	100
Quill taper	MT5
<b>DIMENSIONS AND WEIGHT</b>	
Length, mm	3290
Width, mm	1845
Height, mm	1915
Weight, kg	2200

## Standard equipment

- Fanuc cycle CNC control system
- Handles for work as the universal machine
- Control panel with touchscreen
- 3-jaws manual self centering chuck
- 4-position toolholder of exact positioning (with hirth coupling), 25x25 mm
- Chuck guard with lock
- Toolholder protective cover with watch window
- 8-position turret VDI40
- Work light
- Tailstock on inflatable bag with dead center and live centers
- Coolant system
- Chip tray
- Toolkit for machine installation

## Options

- Upgrade the machine to a complete Fanuc 0i-TF CNC system
- Movable machine cover
- Semi-cover and full cover machine protection
- Turret with vertical rotation axis, 4-position
- VDI40 8-position turret
- Hydro and pneumatic 3-jaw chucks
- Hydraulic drive of tailstock quill (instead of manual)
- Hydraulic station (for quill hydraulic drive, hydraulic chucks)
- Follow and steady rests
- Chip conveyor with built-in tank and coolant pump (instead of coolant tank)
- Coolant gun
- Electric cabinet conditioner

# LATHES FOR MODERATE CUTTING DUTY

Lathes with cycle CNC control system

## CA500F2, CA600F2, CA700F2, CA800F2



### Main advantages

- Advanced cycle CNC control system Fanuc, provides CNC functions efficiency, facilitates operator's servicing, maintains manual control by means of MPG and intermediate switch.
- Rigid construction: rigid solid-cast bed, wide v-guides, five precision radial-axial bearings in the spindle unit, feeds servo-drives and ball screws instead of mechanical kinematic relations, – all this ensures accuracy and reliability of the machine.
- Turret (up to 8 tools) with vertical and horizontal rotation axis and with automatic tool change (option) instead of manual tool holder dramatically expands technological capacity of the machine.
- High-quality units and components: planetary gearbox Baruffaldi, Italy; ballscrew KSK, Czech Republic; turret Baruffaldi, Italy; bearings NSK, Japan; chuck ROHM, Germany/ Bison, Poland.



Technical specification	CA500F2	CA600F2	CA700F2	CA800F2
CUTTING AREA				
Max. diameter of the workpiece to be processed over bed, mm	500	560	700	800
Max. diameter of the workpiece to be processed over carriage, mm	290	360	430	540
Distance between centers	800/1300/1800/2800		850/1430/1850/2850/3850	
Max. weight of the workpiece	1500		3500	
SPINDLE				
Spindle speed, rpm	3500	2800	1600	
Speed adjustment	Stepless at 2 ranges			
Main motor power, kW	15/18.5		22/26	
Max. torque, Nm	704/880		1750/2187.5	
Chuck diameter, mm	250 (315, 400*)	315 (400, 500*)	(500, 630*)	400 (500, 630*)
Spindle nose according to DIN55026	A6	A11	A11	
Spindle bore, mm	55	102		
RAPID FEED				
X rapid feed, mm/min			4000	
Z rapid feed, mm/min			6000	
FEED				
X cutting feed range, mm/min			1-2000	
Z cutting feed range, mm/min			1-4000	
Cut thread stroke limit, rpm			0.5-150	
Feed speed adjustment	Stepless			
TOOLHOLDER				
Number of tools	4 (8*)			
Tool section, mm	25x25	25x25 (32x32*)	32x32 (25x25*)	
Tool change	Manual (automatic*)			
TAILSTOCK				
Quill travel, mm	200		240	
Quill diameter, mm	100		120	
Quill taper	MT5		MT6	
DIMENSIONS AND WEIGHT				
Length, mm	3297/3877/4377/5377		3393/4393/5393/6393	
Width, mm	1616 2220		2080 2690	
Height, mm	2170	2170	1906	
Weight, kg	2400/2800/ 3200/3700	2400/2800/ 3200/4000	4500/5000/ 5700/6300	4800/5300/ 6000/6600

\* option

## Standard equipment

- Cycle CNC control system Fanuc
- Control panel with MPG portable touchscreen
- 3-jaws manual self centering chuck
- Semi-cover machine protection
- 4-position toolholder of exact positioning (with hirth coupling), 25x25 mm
- Chuck guard with locking
- Work light
- Tailstock on inflatable bag with dead center and live center
- Coolant system
- Chip tray
- Toolkit for machine installation

## Options

- Toolholder of exact positioning, 4-position, 32x32 mm
- Turret with vertical rotation axis, 4-position
- Turret with horizontal rotation axis, 8-position
- 3-jaws manual self centering chucks
- 4-jaws manual chucks with indepenent jaws
- Follow rest
- Steady rest
- Spindle plug
- Automatic lubrication
- Semi-cover and full cover machine protection
- Chip conveyor with built-in tank and coolant pump (instead of coolant tank)
- Hydraulic drive of tailstock quill (instead of manual)
- Tipping chip tray (600 l)
- Coolant gun (or pneumatic gun)
- Electric cabinet
- Mechanized chucks with hydro (pneumo) drive

# LATHES FOR MODERATE CUTTING DUTY

Lathes with cycle CNC control system

мод. CA750F2K, CA1000F2K



## Main advantages

- Advanced cycle CNC control system Fanuc, provides CNC functions efficiency, facilitates operator`s servicing, maintains manual control by means of MPG and intermediate switch.
- Optimal design solution: rigid solid-cast bed, antibacklash linear slide roller bearing units, five precision angular contact bearings in the spindle unit, feed servo drives and ball screw instead of mechanical kinematic relations – all this ensures accuracy and reliability of the machine.
- Turret (up to 8 tools) with vertical and horizontal rotation axis and with automatic tool change (option) instead of manual tool holder dramatically expands technological capacity of the machine.
- High-quality units and components: planetary gearbox Baruffaldi, Italy; ballscrew KSK, Czech Republic; turret Baruffaldi, Italy; bearings NSK, Japan; chuck ROHM, Germany/ Bison, Poland.

Technical specification	CA750F2K	CA1000F2K
CUTTING AREA		
Max. diameter of the workpiece to be processed over bed, mm	800	990
Max. diameter of the workpiece to be processed over carriage, mm	450	600
Length of the workpiece processed, mm	855/1855/2855/3855/4855	
Max. weight of the workpiece installed (in chuck/in centers), kg	400/3000	
SPINDLE		
Speed range, rpm	5-2200 (5-2800*)	
Speed adjustment	Stepless at 2 ranges	
Main motor power/30 min, kW	32.6/40	
Max. torque/30 min, Nm	1500/1875	1470/1842 (1166/1457*)
Chuck dia, mm	400 (500, 630)	
Spindle nose	A11 according to DIN55026	
Spindle bore, mm	166 (102*)	
FEED		
Cutting feed range, mm/min	1-4000	
Cut thread range, rpm	0.5-150	
X/Z rapid feed, mm/min	6000	
TOOLHOLDER		
Number of tools	4 (12*)	
Tool section, mm	32x32 (40x32, 32x32, 32x25*)	
Tool change	Manual (automatic*)	
TAILSTOCK		
Quill travel, mm	240	
Quill dia, mm	120	
Quill taper	MT6	
DIMENSIONS AND WEIGHT		
Length, mm	4565/5565/6565/7565/8565	
Width, mm without panel swivel with panel swivel	2075 2555	2100 2600
Height, mm	2120	
Weight, kg	6150/7150/8150/9150/10150	6000/7000/8000/9000/10000

\* option

## Standard equipment

- Cycle CNC control system Fanuc
- Control panel with touchscreen
- MPG portable
- 3-jaws manual self centering chuck Ø400 mm
- 4-position toolholder of exact positioning (with hirth coupling 32x32)
- Tailstock with dead center and live center
- Semi-cover machine protection
- Work light
- Coolant system
- Chip tray
- Toolkit for machine installation

## Options

- 4-position toolholder "Hirth" (40x32)
- 4-position turret with vertical rotation axis
- 8-position turret with horizontal rotation axis
- 3-jaws manual self centering chucks
- 4-jaws manual chucks with jaws independent travel
- Hydro- and pneumatic 3-jaws chucks
- Hydraulic drive of tailstock quill (instead of manual)
- Hydraulic station (for quill hydraulic drive, hydraulic chucks)
- Follow and steady rests
- Portable rest
- Chip conveyor with built-in tank and coolant pump (instead of coolant tank)
- Tipping chip tray (600 l)
- Coolant gun (or pneumatic gun)
- Electric cabinet conditioner
- Full cover (instead of semi-cover) protection



## LATHES FOR MODERATE CUTTING DUTY

CNC lathes (F3) and CNC lathes with milling function (F4)

**CA500F3/F4, CA600F3/F4,  
CA700F3/F4, CA800F3/F4**



### Main advantages

- Rigid solid-cast bed artificially aged for stress relieving provides long-term stability of the machine accuracy.
- Wide v-guides hardened at depth 1.5-2 mm to 52 HRC and grinded ensure long life.
- Surfaces of moving units (carriage, tailstock) are scrapped and covered by special antifriction coating to provide movement with min. runout and friction-free.
- 3 axis 2 ranges headstock with stepless adjustment provides high torque (up to 2200 Nm) with increased accuracy.
- Linear scales at all the axes (option).
- High-quality units and components: planetary gearbox Baruffaldi, Italy; ballscrew KSK, Czech Republic; turret Baruffaldi, Italy; bearings NSK, Japan; chuck ROHM, Germany/ Bison, Poland.

Technical specification	CA500F3/F4	CA600F3/F4	CA700F3/F4	CA800F3/F4
CUTTING AREA				
Max. dia of the workpiece to be installed over bed, mm	500	560	700	800
Max. dia of the workpiece to be processed over carriage, mm	290	320	430	540
Distance between the centers, mm	1000/1500/2000/3000		1000/2000/3000/4000	
Max. weight of the workpiece	1500		3500	
SPINDLE				
Max. speed,	3500	2800	1600	
Speed adjustment	Stepless at two ranges			
Main motor power, kW	15/18.5 (Fanuc) 12/15 (Siemens)		22/26 (Fanuc) 17/20.4 (Siemens)	
Max. torque, Nm	688/848 (Fanuc) 820/1025 (Siemens)	783/978 (Fanuc) 943/1178 (Siemens)	1750/2187,5 (Fanuc) 2028/2535 (Siemens)	
Chuck dia, mm	250 (315, 400*)	315 (400, 500*)	400 (500, 630*)	
Spindle nose according to DIN55026	A6	A11	A11	
Spindle bore, mm	55	102	140	
RAPID FEED				
Carriage cross travel, mm	265		430	
X axis rapid feed, mm/min	5000			
Z axis rapid feed, mm/min	10000 (6000 for distance between centers 3000 mm)			
FEED				
X axis cutting feed range, mm/min	1-4000			
Z axis cutting feed range, mm/min	1-4000			
Cut thread range, mm/rev.	0.1-160		0.1-320	
Feed speed adjustment	Stepless			
TOOLHOLDER				
Number of tools	8 (4*)			
Tool section, mm	25x25	25x25 (32x32*)	25x25 (32x32*)	
Tool change	Automatic			
TAILSTOCK				
Quill travel, mm	180		240	
Quill diameter, mm	80		120	
Quill taper	MT5		MT6	
DIMENSIONS AND WEIGHT				
Length, mm	3297/3877/4377/5377		3393/4393/5393/6393	
Width, mm				
without panel swivel	1616		2080	
with panel swivel	2220		2690	
Height, mm	2170		1906	
Weight, kg	2400/2800/ 3200/3700	2800/3200/ 3500/4000	4500/5000/ 5700/6300	4800/5300/ 6000/6600

\* option

## Standard equipment

- CNC Fanuc Oi-TF
- 3-jaws manual self centering chuck
- 8-position turret with horizontal rotation axis, type VDI40
- Tailstock with dead center and live center
- Semi-cover machine protection
- Work light
- Coolant system
- Chip tray
- Toolkit for machine installation


## Options

- CNC Siemens 828D
- 4-position turret with vertical rotation axis
- 3-jaws manual self centering chucks
- 4-jaws manual chucks with jaws independent travel
- Hydro- and pneumatic 3-jaws chucks
- Hydraulic drive of tailstock quill (instead of manual)
- Hydraulic station (for quill hydraulic drive, hydraulic chucks)
- Follow and steady rests
- Portable rest
- Chip conveyor with built-in tank and coolant pump (instead of coolant tank)
- Tipping chip tray (600 l)
- Coolant gun (or pneumatic gun)
- Electric cabinet conditioner
- Full cover (instead of semi-cover) protection

# LATHES FOR MODERATE CUTTING DUTY

Turning machining centers , CNC (F3), with milling function (F4)

## HT500F3/F4

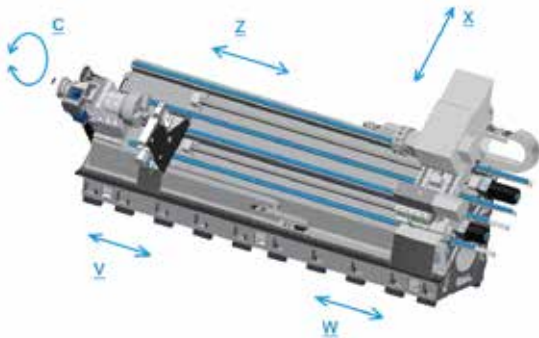

### Main advantages

- 45° slant solid cast bed of grey cast with high damping features.
- Antibacklash linear slide roller bearing units and increased (50 mm) diameter of ball screw with accuracy grade C3 provide high static and dynamic rigidity during longterm operation.
- Increased spindle unit with five precision angular bearings provide machine accuracy and reliability.
- Powerful subspindle (option) dramatically expands machine capacity.
- Spindle speed adjustment range (from 0 to 5000 rpm) makes it possible to perform machining of workpieces made of ferrous and nonferrous materials and alloy steel.
- 12-position turret VDI50 with driven tool and Y axis (option) makes it possible to process complicated workpieces.
- Programmable tailstock with quill hydraulic drive.
- Machining length up to 3000 mm, weight of the workpiece machined in the centers – 2200 kg.



Technical specification	HT500F3/F4
<b>CUTTING AREA</b>	
Max. dia of the workpiece to be installed over bed, mm	700
Max. dia of the workpiece to be processed over bed, mm	600
Max. dia of the workpiece to be processed over carriage, mm	600
Length of the workpiece to be processed, mm	1000/2000/3000
Max. weight of the workpiece installed in the chuck, kg	800
Max. weight of the workpiece installed in the centers, kg	1800
Max. weight of the workpiece installed in the centers and rest, kg	2200
<b>SPINDLE</b>	
Max. spindle speed, rpm	3000 (2200, 5000)*
Main motor power, kW	22/26
Max. torque, Nm	633/800
Spindle speed adjustment	Stepless at 2 ranges
Spindle taper according to DIN55026	A11 (A6)*
Chuck diameter, mm	315 (250, 400)*
Spindle bore, mm	102 (55, 166)*
Bar bore diameter, mm	90 (42)*
<b>SUBSPINDLE PARAMETERS (OPTION)</b>	
Subspindle bore, mm	55
Bar bore dia, mm	42
Max. speed, rpm	5000
Spindle taper according to DIN55026	B-6/A-6
Motor power/30 min, kW	22/26
Max. torque (S1)/30 min	633/800
<b>TRAVEL</b>	
X axis travel, mm	305
Z axis travel, mm	1000/2000/3000
W axis travel (tailstock), mm	800/1800/2800
V axis travel (rest), mm	600/1600/2600
Y axis travel (option), mm	±55
<b>FEED</b>	
X/Z cutting feed, mm/min	1-10000
X/Z rapid feed, mm/min	24000
<b>TURRET</b>	
Number of tools (including driven)	12 (12)
Tool type	VDI50
Drive power, kW	5.5
Max. torque, Nm	35
Tool speed, rpm	4000
<b>TAILSTOCK</b>	
Type of tailstock movement	Programmable
Tailstock construction type	With quill hydraulic drive
Quill taper	MT6
<b>DIMENSIONS AND WEIGHT</b>	
Machine width/with panel swivel, mm	2625/3030
Height, mm	2300
Length, mm	3925/4925/5925
Weight, kg	8000/10000/12000

\* option

## Standard equipment

- CNC Fanuc Oi-TF
- MPG portable
- Headstock with spindle bore Ø102 mm
- 3-jaws self centering hydraulic chuck
- 12-position turret with driven tool, VDI50
- Tailstock with quill hydraulic drive with built-in spindle including center
- Hydraulic station
- Automatic lubrication system
- Foot pedal for chuck and tailstock control
- Coolant system with tank
- Full cover protection
- Work light
- Spare parts
- Toolkit for installation


## Options

- CNC Siemens 828D
- Machine with Y axis
- Spindle C axis
- Subspindle, 15/18 kW, 4500 rpm
- Spindle bore up to Ø55 mm, up to Ø166 mm
- 3-jaws self centering hydraulic chuck
- Self centering rests with hydraulic drive
- Manual portable/automatic sensor for tool control
- Chip conveyor with built-in tank and coolant pump (instead of coolant tank)
- Tipping chip tray (600 l)
- Coolant gun (or pneumatic gun)
- Electric cabinet conditioner
- Bar feeder

# LATHES FOR MODERATE CUTTING DUTY

Turning machining centers, CNC (F3), with milling function (F4)

## HT700F3/F4

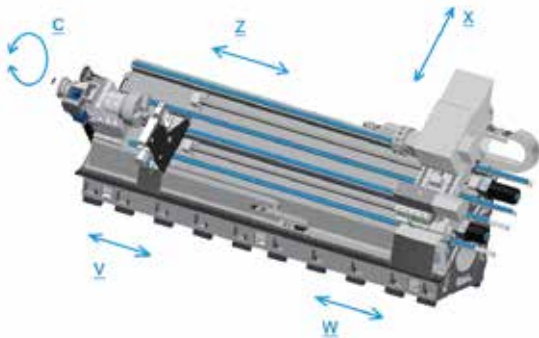

### Main advantages

- Solid cast iron bed with high damping characteristics.
- Wide (710 mm) prismatic sliding guides and an increased (50 mm) diameter of ball screws with accuracy class C3 guarantee static and dynamic rigidity over a long service life.
- Reinforced spindle unit with five precision angular contact bearings ensures accuracy and reliability of the machine.
- Spindle speed adjustment (from 0 to 5000 rpm) allows to perform machining from both ferrous and non-ferrous metals and from alloyed steels.
- The machine could be equipped with subspindle instead of tailstock.
- The 12-position turret VDI60/BMT85 with the living tool and the Y axis (option) allows the processing of parts of a complex profile.
- Programmable tailstock with hydraulic quill.
- High (2160 Nm) torque ensures stability under heavy cutting conditions.
- The surfaces of movable units (carriage, tailstock) are scraped and covered with a special anti-friction coating to move with minimal wear and no friction.
- Machining length up to 3800 mm, the weight of the workpiece in the centers – 3000 kg.

Technical specification	HT700F3/F4
<b>CUTTING AREA</b>	
Max. diameter of the workpiece to be installed over bed, mm	900
Max. diameter of the workpiece to be processed over bed, mm	700
Max. diameter of the workpiece to be processed over carriage, mm	700
Workpiece length, mm	1300/1800/2800/3800
Max. weight of the workpiece to be installed in chuck, kg	1000
Max. weight of the workpiece to be installed in centers, kg	2000
Max. weight of the workpiece to be installed in centers and in rest, kg	3000
<b>SPINDLE</b>	
Max. spindle speed, rpm	3000 (5000)*
Main motor power, kW	30/37
Max. torque, Nm	1747/2160
Speed adjustment	Stepless at 2 ranges
Spindle nose according to DIN55026	A2-11
Chuck diameter, mm	450 (500, 600)*
Diameter of spindle bore, mm	155
Bar bore diameter, mm	117
<b>TRAVEL</b>	
X axis travel, mm	385
Z axis travel, mm	1500/2000/3000/4000
W axis travel (tailstock), mm	1300/1800/2000/3800
Y axis travel (option), mm	±55
<b>FEED</b>	
X/Z cutting feed, mm/min	1-10000
X/Z rapid feed, mm/min	20000
<b>TURRET</b>	
Number of tools (incl. driven tool)	12 (12)
Toolholder type	VDI60/BMT85
Drive power, kW	3.7
Max. torque, Nm	35
Tool speed, rpm	4000
<b>TAILSTOCK</b>	
Type of the tailstock body movement along the guide ways	Programmable
Tailstock construction	With hydraulic quill
Quill taper	MT5
<b>DIMENSIONS AND WEIGHT</b>	
Width, mm	2500
Height, mm	2400
Length, mm	5600/6500/7200/8200
Weight, kg	12000/14000/16000/17000

\* option

## Standard equipment

- Fanuc Oi-TF
- MPG portable
- Hydraulic 3-jaws self centering chuck
- 12-position turret with driven tool, VDI60
- Tailstock with hydraulic quill, with a rotating spindle built into the quill, with center
- Hydraulic station
- Auto lubrication system for guideways
- Foot pedal to control the chuck and tailstock
- Coolant system with coolant tank
- Full cover protection
- Work light
- Spare parts kit
- Leveling pads

## Options

- Siemens 828D CNC system
- 12-position turret with driven tool, type BMT85
- Machine with Y axis
- Spindle "C" axis
- Hydraulic 3-jaws self centering chuck
- Self centering rests with hydraulic driver
- Manual removable/automatic tool control gauge
- Chip conveyor with in-built tank and coolant pump (instead of coolant tank)
- Tipping chip tray (600 l)
- Coolant gun (or pneumatic gun)
- Air conditioner
- Bar feeder



## LATHES FOR MODERATE CUTTING DUTY

Turning machining centers, CNC (F3), with milling function (F4)

### CA750F3/F4K, CA1000F3/F4K



#### Main advantages

- Solid cast iron cast iron bed with high damping characteristics.
- The backlash-free roller guides and the increased (50 mm) diameter of the ball screws with accuracy class C3 guarantee static and dynamic rigidity for a long service life.
- The spindle unit with five precision angular contact bearings ensures the accuracy and reliability of the machine.
- 12-position turret VDI50 with driven tool (optional).
- Optical scales along all axes (optional).
- High (up to 2262 Nm) torque ensures stability in heavy cutting conditions.
- Workpiece weight in centers up to 3000 kg.
- High-quality units and components: planetary gearbox Baruffaldi, Italy; ballscrew KSK, Czech Republic; turret Baruffaldi, Italy; bearings NSK, Japan; chuck ROHM, Germany/ Bison, Poland.

Technical specification	CA750F3/F4K	CA1000F3/F4K
CUTTING AREA		
Max. diameter of the workpiece to be installed over bed, mm	850	990
Max. diameter of the workpiece to be processed over carriage, mm	450	600
Distande between centers, mm	1000/2000/3000/4000/5000	
Max. weight of the workpiece, kg	3000	
SPINDLE		
Speed range, rpm	5-2800 (5-2200*)	
Speed adjustment	Stepless at 2 ranges	
Main motor power/30 min, kW	30/37.5 (Fanuc) 30/37.5 (Siemens)	
Max. torque/30 min, Nm	1772/2215 (1394/1742*) (Fanuc) 1360/1700 (1070/1337*) (Siemens)	
Chuck diameter, mm	400 (500, 630*)	
Spindle nose	A11 according to DIN55026	
Diameter of spindle bore, mm	166 (102*)	
FEED		
Cutting feed range, mm/min	1-4000	
Cut thread stroke limit, mm/rev	0.2-150	
X and Z rapid feed, mm/min	10000	
TURRET		
Number of tools	12 (4*)	
Tool section, mm	32x25 (32x32, 40x40*)	
Number of driven tools	12*	
Driven tool power, kW	7.5*	
Driven tool speed, rpm	5000*	
TAILSTOCK		
Quill travel, mm	240	
Quill diameter, mm	120	
Quill taper	MT6	
DIMENSIONS AND WEIGHT		
Length, mm	4445/5445/6445/7445/8445	
Width (with/without control panel), mm	2150/2818	
Height, mm	2200	
Weight, kg	5800/6800/7800/8800/9800	

\* option

## Standard equipment

- Fanuc Oi-TF CNC system
- MPG portable
- 3-jaws self centering manual chuck Ø400 mm
- 12-position turret VDI50
- Tailstock with live and dead centers
- Semi-cover protection
- Work light
- Coolant system
- Chip tray
- Leveling pads

## Options

- Siemens 828D CNC system
- 12-position turret with driven tool, VDI50, Baruffaldi 8-position turret VDI50, Baruffaldi or 4-position turret with vertical axis
- 3-jaws self centering manual chuck
- 4-jaws chucks with independent jaws movement, manual
- Pneumatic 3-jaws chucks
- Spindle "C" axis
- Follow and steady rests
- Remote rest
- Chip conveyor with in-built tank and coolant pump (instead of coolant tank)
- Tipping chip tray (600 l)
- Coolant gun (or pneumatic gun)
- Air conditioner
- Full cover (instead of semi-cover) protection

# LATHES FOR HEAVY CUTTING DUTY

Lathes with cycle CNC control system

## CA1100F2, CA1250F2, CA1400F2



### Main advantages

- Cycle CNC control system Fanuc is the latest operational control system, which provides the functionality of the CNC system with ease of maintenance by the operator and maintaining the possibility of manual control through the handwheel and cross switch.
- High (up to 7625 Nm) torque on the spindle ensures performance on the most heavy cutting conditions.
- The maximum weight of the workpiece to be processed in centers up to 8 tons, length up to 12 m.
- Solid cast iron bed and wide prismatic and flat sliding guides ensure static and dynamic rigidity for a long service life.
- Special stand for boring bars  $\varnothing 100$  mm.
- High-quality units and components: planetary gearbox Baruffaldi, Italy; ballscrew KSK, Czech Republic; turret Baruffaldi, Italy; bearings NSK, Japan; chuck ROHM, Germany/ Bison, Poland.



Technical specification	CA1100F2	CA1250F2	CA1400F2
CUTTING AREA			
Max. diameter of the workpiece to be installed and processed, mm over bed	1080	265	1450
over carriage	660	860	1060
Distance between centers, mm	1000/2000/3000/5000/7000/8000/12000		
Max. weight of the installed workpiece, kg	8000		
SPINDLE			
Spindle speed, rpm	5...750		
Speed adjustment	Stepless at 2 ranges		
Main motor power, kW	30/37		
Max. torque, Nm	4980/6225		
Chuck diameter, mm	1000 (500, 630, 800*)		
Spindle nose according to DIN55026	A15		
Diameter of spindle bore, mm	180		
FEED			
Cut thread stroke limit, mm/rev.	0.5-150		
X/Z cutting feed range, mm/min	1-4000		
X and Z rapid feed, mm/min	6000		
Feed adjustment	Stepless		
TOOLHOLDER			
Number of tools	4 (12*)		
Tool section, mm	50x40 (40x40, 32x25*)		
TAILSTOCK			
Quill travel, mm	275		
Quill diameter, mm	180		
Quill taper	MT6		
DIMENSIONS AND WEIGHT			
Length, mm	5183/6183/7183/.../16183		
Width, mm			
without panel swivel	2655		2655
with panel swivel	3317		3317
Height, mm	2600		2600
Weight, kg	10000/11000/12000...	10000/11000/12000...	10000/11000/12000...

\* option

## Standard equipment

- Cycle CNC control system Fanuc
- MPG portable
- 4-jaws chuck with independent jaws movement, Ø1000 mm
- 4-position toolholder with "Hirth" coupling
- Tailstock with hydraulic quill, with a rotating spindle built into the quill, with center MT6
- Semi-cover protection
- Work light
- Coolant system
- Chip tray
- Leveling pads

## Options

- 4-position turret with vertical axis
- 8-position turret with horizontal axis
- 3-jaws self centering manual chuck
- 4-jaws chucks with independent jaws movement, manual
- Pneumatic 3-jaws chuck
- Hydraulic quill of tailstock (instead of manual)
- Hydraulic station (for quill hydraulic driver, hydraulic chucks)
- Follow and steady rests
- Remote rest
- Chip conveyor with in-built tank and coolant pump (instead of coolant tank)
- Tipping chip tray (600 l)
- Coolant gun (or pneumatic gun)
- Air conditioner
- Full cover protection (instead of semi-cover) protection

# LATHES FOR HEAVY CUTTING DUTY

Turning machining centers , CNC (F3), with milling function (F4)

## CA1100F3/F4, CA1250F3/F4, CA1400F3/F4



### Main advantages

- High (up to 6675 Nm) torque on the spindle allows machining on the most heavy cutting conditions.
- The maximum weight of the workpiece to be processed in centers up to 8 tons, length up to 12 m.
- Solid cast iron bed and wide prismatic and flat sliding guide ways ensure static and dynamic rigidity for a long service life.
- 12-position turret VDI50 with driven tool (optional) expands the technological capabilities of the machine.
- Special stand for boring bars 100 mm.
- High-quality units and components: planetary gearbox Baruffaldi, Italy; ballscrew KSK, Czech Republic; turret Baruffaldi, Italy; bearings NSK, Japan; chuck ROHM, Germany/ Bison, Poland.

Technical specification	CA1100F3/F4	CA1250F3/F4	CA1400F3/F4
CUTTING AREA			
Max. diameter of the workpiece to be installed and processed, mm			
over bed	1080	1265	1450
over carriage	660	860	1060
Distance between centers, mm	1000/2000/3000/5000/7000/8000/12000		
Max. weight of the installed workpiece (in chuck/in centers), kg	1000/8000		
SPINDLE			
Spindle speed, rpm	5...750		
Speed adjustment	Stepless at 2 ranges		
Main motor power, kW	30/37.5 (Fanuc) 28/35 (Siemens)		
Max. torque, Nm	4980/6225 (Fanuc) 5340/6675 (Siemens)		
Chuck diameter, mm	1000 (500, 630, 800*)		
Spindle nose according to DIN55026	A15		
Diameter of spindle bore, mm	180		
FEED			
Cut thread stroke limit, mm/rev.	0.1-320		
X/Z cutting feed range, mm/min	1-4000		
X and Z rapid feed, mm/min	10000 (6000 for distance between centers 5000 mm)		
Feed adjustment	Stepless		
TURRET			
Number of tools	4 (12*)		
Tool section, mm	40x40 (32x32*)		
Number of driven tools	12*		
Driven tool power, kW	7.5 (8,2)		
Driven tool speed, rpm	5000		
TAILSTOCK			
Quill travel, mm	275		
Quill diameter, mm	180		
Quill taper	MT6		
DIMENSIONS AND WEIGHT			
Length, mm	5183/6183/7183/.../16183		
Width/with control panel swivel, mm	2655/3371		2655/3371
Height, mm	2425		2600
Weight, kg	1000/11000/12000...	10000/11000/12000...	10000/11000/12000...

\* option

## Standard equipment

- Fanuc Oi-TF CNC system
- MPG portable
- 4-jaws chuck with independent jaws movement, Ø1000 mm
- 4-position turret with vertical axis
- Tailstock with hydraulic quill, with a rotating spindle built into the quill, with center MT6
- Semi-cover protection
- Work light
- Coolant system

## Options

- Siemens 828D CNC system
- 4-position turret with vertical axis
- 12-position turret with horizontal axis

- 12-position turret with horizontal axis and driven tool
- 3-jaws self centering manual chuck
- 4-jaws chucks with independent jaws movement, manual
- Hydraulic and pneumatic chucks
- Spindle "C" axis
- Spindle plug
- Center resistant for spindle
- Hydraulic quill of tailstock
- Hydraulic station (for quill hydraulic driver, hydraulic chucks)
- Follow and steady rests
- Special stand for boring bars
- Chip conveyor with in-built tank and coolant pump (instead of coolant tank)
- Tipping chip tray (600 l)
- Coolant gun (or pneumatic gun)
- Air conditioner
- Full cover (instead of semi-cover) protection



# PIPE-THREADING (OIL COUNTRY) LATHES

Conventional pipe-threading (oil country) lathes

## CA983



### Main advantages

- Easy-to-use pipe-threading lathe designed for processing of long pipes and parts of pipe connections with a diameter of up to 340 mm, used for the production and transportation of oil and natural gas.
- It is also suitable for all types of turning works.
- Suitable for cutting metric and inch (including conical) threads.
- It is equipped with a hydraulic mechanism for automation of one thread-cutting passage (hydro-rebound) when threading in manual mode and in a cycle.
- The machine is assembled on a cast iron bed, with hardened sliding guideways.
- The machine is equipped with two mechanized 4-jaws chucks with a diameter of 720 mm.

Technical specification	CA983
<b>WORKING AREA</b>	
Spindle bore diameter, mm	Ø340
Max. diameter of the workpiece to be processed over bed/carriage, mm	830/450
Length of the workpiece to be processed in centers, mm	1000/2000/3000
Max. length of the workpiece to be processed with taper attachment, mm	500
Max. weight of the workpiece processed in chuck/centers, kg	2000/5000
<b>SPINDLE</b>	
Max. spindle speed, rpm	8-355
Speed adjustment	Step (12 steps)
Main motor power, kW	15
Max. torque, Nm	3000
Chuck diameter, mm	720
<b>TRAVEL</b>	
X axis travel, mm	500
Z axis travel, mm	1000/2000/3000
<b>RAPID FEED</b>	
X axis rapid feed, mm/min	2200
Z axis rapid feed, mm/min	5300
<b>FEED</b>	
Cutting feed range, mm/min	0.042-1.179
Cut thread range, mm/rev	0.09-2.67
<b>CUT THREADS STROKE LIMITS</b>	
Metric, mm	1-28
Inch, thread per inch	28-1
<b>TURRET</b>	
Number of tools	4
Tool section, mm	32x32
Rotary mechanism	Manual
<b>TAILSTOCK</b>	
Quill travel, mm	240
Quill diameter, mm	120
Quill taper	MT6
<b>DIMENSIONS AND WEIGHT</b>	
Length, mm	3640/4640/5640
Width, mm	2050
Height, mm	1675
Weight, kg	10300/10900/11500

\* option

## Standard equipment

- 4-position tool holder with hydro-rebound
- Flap on the carriage with inspection glass
- Taper attachment
- Tailstock with dead and live centers MT6
- Self-centering 4-jaw chucks with independent movement of jaws and electromechanical clamping
- Chucks guard with locking
- Coolant tank
- Work light
- Leveling pads

## Options

- Follow rest
- Steady rest
- Removable supporting rest

# PIPE-THREADING (OIL COUNTRY) LATHES

CNC pipe-threading (oil country) lathes

## CA700F2/F3, CA750F2/F3



### Main advantages

- Cycle CNC or CNC version.
- Designed for processing in automatic and semi-automatic cycle of long pipes and parts of pipe connections with a diameter of up to 375 mm, used for the production and transportation of oil and natural gas.
- It is also suitable for all types of turning works.
- The machine is assembled on a cast iron bed with rolling guideways.
- High-quality units and components: planetary gearbox Baruffaldi, Italy; ballscrew KSK, Czech Republic; turret Baruffaldi, Italy; bearings NSK, Japan; chuck ROHM, Germany/ Bison, Poland.

Technical specification	CA700F3	CA750F3	CA1000F3
WORKING AREA			
Spindle bore diameter, mm	145	166	260 (375*)
Max. diameter of the workpiece to be processed and to be installed, mm	700	800	990
	430	450	600
Max. length of the workpiece to be installed in centers, mm	900/1900/2900	1000/2000/3000/4000/5000	1155/2155/3155/4155/5155
Max. length of the workpiece to be processed in centers, mm	850/1850/2850/3850	950/1950/2950/3950/4950	930/1930/2930/3930/4930
Max. weight of the installed workpiece (in chuck/in centers), kg	400/3500	400/3000	400/3000
SPINDLE			
Spindle speed, rpm	4...1600	5...2200	0...1200 – для Ø260 0...500 – для Ø375
Speed adjustment	Бесступенчатое в 2-х диапазонах		
Main motor power, kW	Fanuc 22/26 Siemens 17/20,4	30/37 (37/46)*	30/37 (37/46)*
Max. torque, Nm	Fanuc 1750/2075 Siemens 2025/2430	1810/2262 (1710/2137)*	2490/3112 – для Ø260 2820/3525 – для Ø375 (37 кВт)
FEED			
X axis cutting feed range, mm/min.	1-4000	1-4000	1-4000
Z axis cutting feed range, mm/min	1-4000	1-4000	1-4000
Cut threads stroke limits, mm/rev	0,5-150	0,5-150	0,5-150
X axis rapid feed, mm/min	6000	10000	10000
Z axis rapid feed, mm/min	10000	10000	10000
Feed speed adjustment	Бесступенчатое		
TURRET			
Number of tools	8 (4*)	12	12
Tool section, mm	25x25 (32x32*)	32x25 (40x40*)	32x25 (40x40*)
TAILSTOCK			
Quill travel, mm	240	240	240
Quill diameter, mm	120	120	120
DIMENSIONS AND WEIGHT			
Length, mm	3250/4250/5300/6250	4445/5445/6445/7445/8445	4445/5445/6445/7445/8445
Width, mm	2300	2150/2818	2150/2818
Height, mm	1960	2200	2200
Weight, kg	4500/5000/5700/6300	6000/7000/8000/9000/10000	8000/9000/10000/11000/12000

\* option

## Standard equipment

- Fanuc Oi-TF CNC system
- Control panel with touch screen MPG portable
- Self-centering 4-jaw chucks with independent movement of jaws and electromechanical clamping
- 4-position precise positioning cutter head (with Hirth coupling)
- Tailstock with dead and live centers MT6
- Self-centering 3-jaw pneumatic chucks
- Coolant system
- Chip tray
- Semi-cover protection for cutting area
- Work light
- Leveling pads

## Options

- CNC Fanuc Oi-TF/Siemens 828D
- 4-position turret with vertical axis (40x40) (for CA1000)
- 8-position turret VDI40 with horizontal axis
- 12-position turret VDI50 with horizontal axis
- Tailstock quill hydraulic driver
- Hydraulic station (for quill hydraulic driver, hydraulic chucks)
- Follow and steady rests
- 4-jaws pneumatic chucks
- Supporting rest (free standing)
- Chip conveyor with build-in tank and coolant pump (instead of coolant tank)
- Tipping chip tray
- Coolant gun (or pneumatic gun)
- Air conditioner



# PIPE-THREADING (OIL COUNTRY) LATHES

Pipe-threading (oil country) lathes with cycle CNC (F2) and CNC (F3)

## CA983F2/F3



### Main advantages

- Cycle CNC or CNC version.
- Designed for processing in automatic and semi-automatic cycle of long pipes and parts of pipe connections with a diameter of up to 340 mm, used for the production and transportation of oil and natural gas.
- The largest torque (up to 7625 Nm) on the spindle in its class.
- It is also suitable for all types of turning works.
- The machine is assembled on a cast iron bed, with hardened sliding guideways.
- High-quality units and components: planetary gearbox Baruffaldi, Italy; ballscrew KSK, Czech Republic; turret Baruffaldi, Italy; bearings NSK, Japan; chuck ROHM, Germany/ Bison, Poland.

Technical specification	CA983F2	CA983F3
WORKING AREA		
Spindle bore diameter, mm	340	
Max. diameter of workpiece to be installed over bed, mm	830	
Max. diameter of workpiece to be processed over carriage, mm	410	
Lenght of the workpiece to be processed in centers, mm	1050/2050/3050	
Max. weight of the installed workpiece (in chucks/centers), kg	2000/5000	
SPINDLE		
Spindle speed limits, rpm	5-750	
Speed adjustment	Stepless in 2 ranges	
Main motor power, kW	30/37.5	22/26.4 (Siemens) 30/37.5 (Fanuc)
Max. torque, Nm	4982/6228	4200/5250 (Siemens) 4982/6228 (Fanuc)
FEED		
X/Z cutting feed range, mm/min	1-4000	
Cut threads range, mm/rev	0.5-150	
X/Z rapid feed, mm/min	6000	
TURRET		
Number of tools	4 (12*)	
Tool section, mm	40x32 (50x40; 40x40; 32x32; 32x25)*	32x32 (40x40)*
TAILSTOCK		
Quill travel, mm	240	
Quill diameter, mm	120	
Quill taper	MT6	
DIMENSIONS AND WEIGHT		
Length, mm	5170/6170/7170	
Width, mm without panel swivel with panel swivel	3050 3780	
Height, mm	2025	
Weight, kg	10000/11000/12000	

\* option

## Standard equipment

- Cycle CNC control system Fanuc (for F2) or CNC Fanuc 0i-TF (for F3)
- Control panel with touch screen (for F2)
- MPG portable
- Self-centering 4-jaw chucks with independent movement of jaws and electromechanical clamping
- 4-position precise positioning cutter head (with Hirth coupling) (for F2)
- 4-position turret Baruffaldi with vertical axis (for F3)
- Tailstock with dead and live centers MT6
- Coolant system
- Chip tray
- Semi-cover protection for cutting area
- Work light
- Leveling pads

## Options

- CNC Fanuc 0i-TF/Siemens 828D
- 4-position turret Baruffaldi with vertical axis (40x40)
- 12-position turret Baruffaldi VDI50 with horizontal axis
- Tailstock quill hydraulic driver
- Hydraulic station (for quill hydraulic driver, hydraulic chucks)
- Follow and steady rests
- Chip conveyor with build-in tank and coolant pump (instead of coolant tank)
- Supporting rest (free standing)
- Tipping chip tray (600 l)
- Coolant gun (or pneumatic gun)
- Air conditioner

# HEAVY DUTY LATHES WITH STRAIGHT-THROUGH GARRIAGES

with CNC (F3) and milling function (F4)

## CA1120F3/F4, CA1270F3/F4, CA1350F3/F4



### Main advantages

- Provide optimal processing technology for long parts.
- Part processing is carried out along the entire length without reinstalling due to the fact that the carriages have the ability to bypass the rests, go for the headstock and tailstock.
- The length of the workpiece up to 20 meters, weight up to 12 tons.
- It is possible to equip with two carriages and grinding head.
- The positioning accuracy of the axes 20  $\mu\text{m}$  (12  $\mu\text{m}$  optional).
- The carriage moves along the rolling guides, the tailstock is mounted on the sliding guides.

Technical specification	CA1120F3/F4	CA1270F3/F4	CA1350F3/F4
WORKING AREA			
Max. diameter of workpiece to be processed, mm over bed	1100	1285	1350
over carriage	950	1120	1200
Max. weight of the workpiece, kg	12000 (25000*)		
SPINDLE			
Spindle speed limits, rpm	5-750		5-120
Speed adjustment	Stepless		
Number of spindle speed ranges	2		4
Main motor power, kW	60/75		30/37
Max. torque, Nm	9160/11450		9160/11450
Spindle nose according to DIN55026	A15		
Spindle bore diameter, mm	180		
RAPID FEED			
X axis, mm/min	4000		5000
Z axis, mm/min	6000		5000
FEED			
X and Z axes cutting feed range, mm/min	1-4000		0.5-5000
Cut threads stroke limits, mm/rev	0.1-320		
TURRET			
Number of tools	4 (12)*		
Tool section	40x40 (32x32; VDI50*)		
TURRET WITH DRIVEN TOOL*			
Number of driven tools	12		
Driven tool power, kW	7.5*		
Driven tool speed, rpm	4000		2000 (4000)*
TAILSTOCK			
Tailstock quill travel, mm	320		
Tailstock quill diameter, mm	280		
Tailstock quill taper	M90		
DIMENSIONS AND WEIGHT			
Length, mm	7000/9000/10700/11700/13700/15700/17700/19700/21700/23700		
Width, mm	3300		
Height, mm	2400		
Weight, kg	13000/15000/17000/18000/20000/22000/24000/26000/28000/30000		

\* option

## Standard equipment

- Fanuc Oi-TF CNC system including all drivers
- MPG portable
- 4-jaw chuck with independent movement of jaws Ø1000 mm
- One carriage
- 4-position turret with vertical axis
- Tailstock with a rotating spindle build into the quill complete with center, quill hydraulic driver and moving electric driver
- Hydraulic station
- Coolant system
- Chip tray
- The protection guarding of the cutting area with one movable gate
- Work light
- Leveling pads

## Options


- Siemens 828D CNC system
- 4-position turret with vertical axis (40x40)
- 12-position turret VDI50 with horizontal axis
- 12-position turret VDI50 with horizontal axis and driven tool
- Second carriage with turret
- Self-centering 3-jaw manual chucks
- 4-jaw manual chucks with independent movement of jaws
- Mechanized chucks  
(with hydraulic or pneumatic driver)
- Follow and steady rests
- Self-centering rests with hydraulic driver
- Chip conveyor with build-in tank and coolant pump  
(instead of coolant tank)
- Tipping chip tray
- Coolant gun (or pneumatic gun)
- Air conditioner



# HEAVY DUTY LATHES WITH STRAIGHT-THROUGH GARRIAGES

with CNC (F3) and milling function (F4)

## CA1600F3/F4P, CA2000F3/F4P

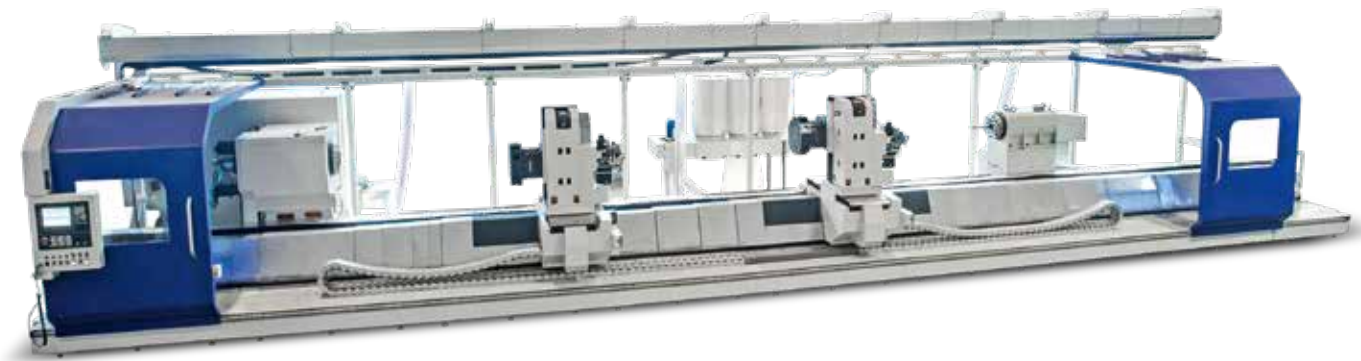

### Main advantages

- Provide optimal processing technology for long parts.
- Part processing is carried out along the entire length without reinstalling due to the fact that the carriages have the ability to bypass the rests, go for the headstock and tailstock.
- The length of the workpiece up to 25 meters, weight up to 35 tons.
- It is possible to equip with two carriages and grinding head.
- The positioning accuracy of the axes 20  $\mu\text{m}$  (12  $\mu\text{m}$  optional).
- The carriage moves along the rolling guides, the tailstock is mounted on the sliding guides.

Technical specification	CA1600F3/F4P	CA2000F3/F4P
WORKING AREA		
Max. diameter of workpiece to be processed, mm over bed over carriage	1600 1350	2000 1600
Max. weight of workpiece, kg	35000	
SPINDLE		
Spindle speed limits, rpm	5-550	
Speed adjustment	Stepless	
Number of spindle speed ranges	4	
Main motor power, kW	84/105	
Max. torque, Nm	45000/56250	
Spindle nose according to DIN55026	A15	
Spindle bore diameter, mm	150	
RAPID FEED		
X axis, mm/min	10000	
Z axis, mm/min	10000	
FEED		
X and Z axes cutting feed range, mm/min	1-4000	
Cut threads stroke limits, mm/rev	0.5-250	
TURRET		
Number of tools	4 (12)*	
Max. height of the cutters, mm	50	
TURRET WITH DRIVEN TOOL*		
Number of driven tools	12	
Driven tool power, kW	7.5*	
Driven tool speed, rpm	4000	
TAILSTOCK		
Tailstock quill travel, mm	320	
Tailstock quill diameter, mm	280	
Tailstock quill taper	M90	
DIMENSIONS AND WEIGHT		
Length mm	11500/13500/15500	
Width, mm	3500	
Height, mm	3100	3500
Weight, kg	40000/46000/52000	42000/48000/54000

\* option

## Standard equipment

- Fanuc Oi-TF CNC system including all drivers
- MPG portable
- One carriage
- 4-position turret with vertical axis
- Tailstock with a rotating spindle build into the quill complete with center, quill hydraulic driver and moving electric driver
- Hydraulic station
- Coolant system
- Chip tray
- The protection guarding of the cutting area with one movable gate
- Work light
- Leveling pads

## Options

- Siemens 828D CNC system
- 4-position turret with vertical axis (40x40)
- 12-position turret VDI50 with horizontal axis
- 12-position turret VDI50 with horizontal axis and driven tool
- Second carriage with turret
- Self-centering 3-jaw manual chucks
- 4-jaw manual chucks with independent movement of jaws
- Mechanized chucks  
(with hydraulic or pneumatic driver)
- Follow and steady rests
- Self-centering rests with hydraulic driver
- Chip conveyor with build-in tank and coolant pump  
(instead of coolant tank)
- Tipping chip tray (600 l)
- Coolant gun (or pneumatic gun)
- Air conditioner

# CONVENTIONAL MILLING AND LATHE MACHINES

Milling machine with swivel head

## 6820F1



### Main advantages

- Rigid construction ensures accuracy and reliability of the machine.
- The powerful swivel milling head allows to perform horizontal and vertical milling and also milling at any angle.
- By installing ballscrews, servomotors and feed drives the kinematics of the machine is simplified, and the feed rate control is infinitely variable
- High-precision ball screws (C3 precision ground) with a double nut guarantee rigidity and accuracy even at long-term heavy loadings.
- Hardened and grinded guide ways guarantee high precision of the machine and long service life.
- DRO facilitates machine operation.

Technical specification	6820F1
<b>CUTTING AREA</b>	
Table size (LxW), mm	2000x530
Max. table loading, kg	2000
<b>SPINDLE</b>	
Max. spindle speed, rpm	1800
Max. torque, Nm	1814
Number of spindle speeds	12
Main motor power, kW	7,6
<b>ROTARY HEAD</b>	
Taper	50
Tool clamp	Hydraulic
Swivel range, up head, degree	+90 ... -90
Swivel range, low head, degree	0 ... +180
<b>FEED</b>	
X and Z axes cutting feed range, mm/min	1-4000
Cut threads stroke limits, mm/rev	0.5-250
<b>TRAVEL</b>	
X axis travel	1400
(Cross travel of the table), mm	600
Y axis travel	650
<b>FEED</b>	
Longitudinal and cross feedrate, mm/min	2000
Vertical feedrate, mm/min	1000
Longitudinal and cross rapid feedrate, mm/min	5000
Vertical rapid feedrate, mm/min	2500
<b>FEED MOTOR</b>	
Motor power, Kw	4.2
Motor type	Servo
<b>DIMENSIONS AND WEIGHT</b>	
Length, mm	4660
Width, mm	2600
Height, mm	2700
Weight, kg	7000

\* option

## Standard equipment

- Rotary milling head
- DRO
- Linear scales for all axes
- MPG portable
- Variable-frequency feed drive
- Ball screw for X/Y/Z axes
- X/Y axes auto feeding
- Automatic tool clamp/unclamp system
- Pendant control panel
- Work light
- Telescopic cover
- Coolant supply system in cutting area
- Tool kit
- Operation manual

## Options

- Auto cycle
- Horizontal tool holder



# CONVENTIONAL MILLING AND LATHE MACHINES

Manually operated lathes

## CA500, CA600



### Main advantages

- Rigid solid-cast bed artificially aged for stress relieving provides long-term stability of the machine accuracy.
- Wide v-guides hardened at depth 1.5-2 mm to 52 HRC and grinded ensure long life.
- Surfaces of moving units (carriage, tailstock) are scrapped.
- Solid metal spindle is assembled using high precision angular bearing (one duplex bearing in front and one – from the rear), it has reduced runout in axial and radial directions even while heavy duty cutting.
- Strict conformity to accuracy grade “High precision” with each machine test report attached.

Technical specification	CA500	CA600
CUTTING AREA		
Max. diameter of the workpiece to be processed over bed, mm	500	550
Max. diameter of the workpiece to be installed over GAP, mm	700*	770*
Max. diameter of the workpiece to be processed over carriage, mm	290	340
Max. length of the workpiece to be installed in centers, mm	1000/1500/2000/3000	
Max. weight of the installed workpiece (in chuck/in centers), kg	300/2000	
SPINDLE		
Spindle speed, rpm	16-2000	16-1600
Speed adjustment	Stepped	
Number of spindle speeds	22	21
Main motor power, kW	7.5 (11*)	11
Max. torque, Nm	1000	
Chuck diameter, mm	250 (315, 400*)	315 (400, 500*)
Spindle nose	A6 according to DIN55027	A11 according to DIN55027
Diameter of spindle bore, mm	55	95
RAPID FEED		
X axis rapid feed, mm/min	1900	
Z axis rapid feed, mm/min	3800	
FEED		
Longitudinal feeds range, mm/rev	0.05-2.8	
Cross feeds range, mm/rev	0.025-1.4	
Metric threads range, mm	0.5-112	
Module threads range, module	0.5-112	
Inch threads range, threads per inch	56-0.5	
Pitch threads range, pitch	56-0.5	
TOOLHOLDER		
Number of tools	4	
Tool section, mm	25x25	
TAILSTOCK		
Quill travel, mm	180	
Quill diameter, mm	80	
Quill taper	MT5	
DIMENSIONS AND WEIGHT		
Length, mm	2800/3380/3880/4880	
Width, mm	1265	1295
Height, mm	1485	1610
Weight, kg	3000/3500/4000/4500	3100/3600/4100/4600

\* option

## Standard equipment

- Headstock dead center
- 3-jaws self centering chuck
- Chuck guard with locking
- Micrometer stop of longitudinal travel
- Mechanized drive of the carriage tool slide
- 4-position toolholder
- Toolholder protective cover with watch window
- Work light
- Tailstock on inflatable bag with dead center and live centers
- Coolant system
- Chip tray
- Toolkit for machine installation

## Options

- 3-jaws self-centering chucks, manual
- 4-jaws chucks with independent jaws movement, manual
- Bed with GAP
- Driver chuck
- Follow rest
- Steady rest
- Remote-mounted support rest (CA600)
- Threaded rest (CA500)
- Set of change gear wheels
- Taper attachment
- Metric thread indicator
- DRO "Newall" for 2 coordinates

## VERTICAL LATHE MACHINING CENTERS WITH CNC (F3) AND MILLING FUNCTION (F4)

### BT1000F3/F4, BT1200F3/F4, BT1600F3/F4



#### Main advantages

- Solid cast slant-bed of high quality cast iron ensures high rigidity and vibration resistance.
- The balancing system of the machine is built on a nitrogen battery, providing the best anti-vibration characteristics compared to counterbalanced balancing systems.
- High spindle drive power.
- The milling function significantly expand the technological capabilities of the machine.

Technical specification	BT1000F3/F4	BT1200F3/F4	BT1600F3/F4
CUTTING AREA			
Facing plate diameter, mm	1000	1250	1600
Max. diameter of the workpiece to be installed, mm	1200	1600	2000
Max. diameter of the workpiece to be processed, mm	1100	1350	1800
Max. height of the workpiece to be processed , mm	950 (1250)*	1250 (1650)*	
Max. workpiece weight, kg	4000	5000	8000
FACING PLATE			
Cuuting feed range, mm/rev	0.01-50		
X axis rapid feed, m/min	12		
Z axis rapid feed, m/min	10		
ATC			
Number of tools	12		
Tool type	BT50		
Max. tool weight, kg	50		
MILLING SPINDLE (+ “C” axis) for F4 series			
Spindle speed, rpm	2400		
Milling spindle torque, Nm	550		
Milling spindle motor power, kW	7.5/11 (15/18.5)		
RAM			
Ram section, mm	230x230		
DIMENSIONS AND WEIGHT			
Length, mm	4120	4700	5050
Width (with chip conveyor), mm	5600	5800	6300
Height, mm	5320	5500	
Weight, kg	24000	32000	35000

\* option

## Standard equipment

- Fanuc Oi-TD CNC system (or Fanuc Oi-TF)
- ATC for 12 tools
- Chiller for gearbox and facing plate
- 4-jaws facing plate
- BT50 tool shank
- Cross beam lifting and lowering system with hydraulic clamping at 4 points
- Auto lubrication system for guideways
- Chip conveyor with chip tank
- Electronic handwheel
- Protective covers
- Transformer
- Leveling pads
- Tool kit

## Options

- ATC for 16, 30, 60, 90 tools
- Extension ram travel
- Column height extension
- Air conditioner for electrical cabinet
- Coolant through spindle
- Tool measurement system
- Workpiece measurement system
- Cross beam navigation system
- Linear scales
- Spindle motor upgrade to 75/100 kW
- Facing plate with hydraulic clamp and 3 or 4 or 6 jaws
- V-slots tool connection in ram
- X and Z axes gearbox 1:3



## VERTICAL LATHE MACHINING CENTERS WITH CNC (F3) AND MILLING FUNCTION (F4)

### BT2000F3/F4, BT2500F3/F4, BT3000F3/F4



#### Main advantages

- Solid cast slant-bed of high quality cast iron ensures high rigidity and vibration resistance.
- The balancing system of the machine is built on a nitrogen battery, providing the best anti-vibration characteristics compared to counterbalanced balancing systems.
- High spindle drive power.
- The milling function significantly expand the technological capabilities of the machine.

Technical specification	BT2000F3/F4	BT2500F3/F4	BT3000F3/F4
CUTTING AREA			
Facing plate diameter, mm	2000	2500	3000
Max. diameter of the workpiece to be installed, mm	2500	3000	3500
Max. diameter of the workpiece to be proccesed, mm	2300	2800	3400
Max. height of the workpiece to be proccesed, mm	1600 (2000)*		1800 (2200)*
Max. workpiece weight, kg	15000		20000
FACING PLATE			
Spindle speed, rpm	2-200	2-160	2-120
Torque, Nm	46000	62700	68000
Main motor power, kW	60/75 (75/100)*		
TRAVEL			
Carriage horizontal travel, mm	2275	2525	2775
Vertical ram travel, mm	1100 (1500)*	1100 (1400)*	1000 (1400)*
Cross rail travel, mm	1150		
FEED			
Cutting feed, mm/rev	0.01-50		
X axis rapid feed, m/min	12	10	
Z axis rapid feed, m/min	10		
ATC			
Number of tools	12	12 (16, 30, 60, 90)	
Tool type	BT50		
Max. tool weight, kg	50		
MILLING SPINDLE (+ “C” axis) for F4 series			
Spindle speed, rpm	2400	2500	
Milling spindle torque, Nm	730		
Milling spindle motor power, kW	11/15 (18/22)		
RAM			
Ram section, mm	280x280		
DIMENSIONS AND WEIGHT			
Length, mm	5050	5400	6100
Width (with chip conveyor), mm	7600		8170
Height, mm	6700		
Weight, ka	43000	52000	56000

\* option

## Standard equipment

- Fanuc Oi-TD CNC system (or Fanuc Oi-TF)
- ATC for 12 tools
- Chiller for gearbox and facing plate
- 4-jaws facing plate
- BT50 tool shank
- Cross beam lifting and lowering system with hydraulic clamping at 4 points
- Auto lubrication system for guideways
- Chip conveyor with chip tank
- Electronic handwheel
- Protective covers
- Transformer
- Leveling pads
- Tool kit

## Options

- ATC for 16, 30, 60, 90 tools
- Extension ram travel
- Column height extension
- Air conditioner for electric cabinet
- Coolant through spindle
- Tool measurement system
- Workpiece measurement system
- Cross beam navigation system
- Linear scales
- Spindle motor upgrade to 75/100 kW
- Facing plate with hydraulic clamp and 3 or 4 or 6 jaws
- V-slots tool connection in ram
- X and Z axes gearbox 1:3

## VERTICAL LATHE MACHINING CENTERS WITH CNC (F3) AND MILLING FUNCTION (F4)

### BT4000F3/F4, BT5000F3/F4, BT6000F3/F4



#### Main advantages

- Solid cast slant-bed of high quality cast iron ensures high rigidity and vibration resistance.
- The balancing system of the machine is built on a nitrogen battery, providing the best anti-vibration characteristics compared to counterbalanced balancing systems.
- High spindle drive power.
- The milling function significantly expand the technological capabilities of the machine.

Technical specification	BT4000F3/F4	BT5000F3/F4	BT6000F3/F4
WORKING AREA			
Facing plate diameter, mm	4000	5000	6000
Max. diameter of workpiece to be installed, mm	5000	6000	7000
Max. diameter of workpiece to be processed, mm	4600	6000	7000
Max. height of the processed workpice , mm	1800 (2200)*	2600	
Max. weight of the processed workpiece, kg	30000 (40000)*	80000	10000
FACING PLATE			
Spindle speed range, rpm	2-60	2-50	2-20
Max. torque, Nm	125000	140000	160000
Main motor power, kW	60/75 (75/100)*		
TRAVEL			
Horizontal travel of the carriage, mm	2775	-100+3000	-100+4000
Vertical travel of the ram, mm	1500	2200	
Cross beam travel, mm	1150 (1500)*	1800	
FEED			
Cutting feed range, mm/rev	0.01-50		
X axis rapid feed, m/min	10		
Z axis rapid feed, m/min	10		
ATC			
Number of tools	12 (30,60, 90)*		
Tool type	BT50		
Max. tool weight, kg	50		
Milling spindle (+“C” axis) for F4 series			
Spindle speed, rpm	2500		
Max. torque, Nm	960		
Milling spindle motor power, kW	15/18		
RAM			
Ram cross section, mm	280x280		
DIMENSIONS AND WEIGHT			
Length, mm	10000	12500	13000
Width (with chip conveyor), mm	8170	9000	
Height, mm	7000	9000	
Weight, kg	82000	140000	170000

\* option

## Standard equipment

- Fanuc Oi-TD CNC system (or Fanuc Oi-TF)
- ATC for 12 tools
- Cooling station of facing plate gearbox
- 4-jaws facing plate
- BT50 tool shank
- Cross beam lifting and lowering system with hydraulic clamping at 4 points
- Auto lubrication system for guideways
- Chip conveyor with coolant tank
- Electronic handwheel
- Protective covers for work area
- Transformer
- Set of pads

## Options

- ATC for 16, 30, 60, 90 tools
- Increasing the travel of the ram
- Increasing the height of the column
- Air conditioner
- Coolant through spindle
- Tool measurement system
- Workpiece measurement system
- Cross beam navigation system
- Linear scales
- Enlarged main motor 75/100 kW
- Facing plate with hydraulic clamp and 3 or 4 or 6 jaws
- V-slots tool connection RAM
- X and Z axes gearbox 1:3



# Casting and machining for customers

## Machine-tool plant Sasta offers its customers comprehensive services for casting and machining.

The sites of the foundry are equipped with modern melting equipment: induction melting units INDUCTOTHERM; IMF forming equipment including third generation high-speed mixers and mechanical regeneration of the molding mixture; automated line of moldless molding.

The main advantage of our foundry is its technological flexibility and opportunity to produce different types of castings according to the integrated solution and within single stream which lets us competently produce orders in small quantity and perform serial production.

## Foundry

- Rated capacity is 250000 kg of cast iron monthly;
- Capacity to produce castings from 10 kg up to 6200 kg;
- Electric furnace with rolling out heater: 9000x2500x2000 mm, 1250 ° C, 18000 kg;
- **CASTING MATERIALS:**
  - Cast iron with lamellar graphite: (engineering castings for general use) graphite cast iron 10, graphite cast iron 15, graphite cast iron 20, graphite cast iron 25, graphite cast iron 30, graphite cast iron 35 (GOST 1412-85)
  - High-strength cast iron with nodular graphite: cast iron 50, cast iron 60, cast iron 70, cast iron 80 (GOST 7293-85)
  - Bearing cast iron: (for castings used in friction units) cast iron -1, cast iron -2 (GOST 1585-85)
  - High-silicon cast-iron: cast iron -15 (GOST 2233-85)
  - High-alloy cast iron: cast iron 16 (GOST 7769-82)
  - Carbon and low-alloy steels: (casting machine parts) steel 10L, steel 15L, steel 20L, steel 25L, steel 30L, steel 40L, steel 45L, steel 50L, steel 60L (GOST 977-88), steel 20X, steel 30X, steel 35X, steel 40X, steel 45X, steel 50X (GOST 4543-71) etc.
- Own factory lab - qualified personnel perform control of castings at different production stages including test works and metrological supervision.
- R&D department is in charge of technical docs' development and production of medium complexity wooden patterns. After order placement for the high complexity pattern production to another enterprise the Department provides technical support.



Currently the plant is conducting technical production re-equipment: the production capacity is expanded due to the introduction of modern hightech equipment, measuring and control devices, which, in its turn, ensures an uninterrupted production cycle and efficiency growth.

## Machining workshop

Machine tool plant Sasta provides mechanical processing of parts, including the processing of large and complex body parts.

The main units are welding and procurement sections, own mechanical processing production, thermal section. The plant's machine tool park includes more than 200 pieces of equipment.

### Dimensions of the max. installed workpieces:

- **Turning:** Ø from 40 to 1000 mm to 4500 mm;
- **Milling:** 2000x5000 mm;
- **Grinding:**
  - Cylindrical grinding machines Ø = 560 mm;
  - Internal grinding machines Ø = 100 mm;
  - Surface grinding machines = 630x2000 mm;
  - Gantry grinding machines = 2000x7000 mm;
- **Boring processing:** 2000x2500 mm;
- **Procurement section:**
  - Waterjet machines = 1600x3200 mm;
  - Laser cutting machines = 1620x3150 mm;
  - Bending machines;
- **Thermal section:**
  - Ø = 500 mm;
- **Assembling.**



# Renishaw measuring systems

for tool setting at CNC lathe machines

Renishaw produces a manual and fully automatic systems for tool set-up.

Non-automatic systems are suitable for those cases when tool adjustment is relatively rare. Fully automatic systems are ideal for frequent re-adjustment of the machine to a new batch of products or the organization of the process, excluding the participation of the operator.



**HPRA** is an insert-type bracket manually installed on the machine for tool setting and which is to be taken off upon the adjustment finish. During measurement performance the arm is fixed at the butt joint providing high repeatable accuracy of the installation. Herewith repeatable positioning accuracy of the sensor probe is within 5 micron ( $2\sigma$ ). When HPRA is not used, it is stored on the stand located on the machine or next to the machine.

**HPPA** is a measuring system with a non-automatic swinging lever on which the contact measuring sensor is installed. This system is permanently fixed to the lathe and can be used at any time for tool setting. The rotating device automatically locks the arm into the socket, ensuring high repeatable accuracy of the sensor location. No adjustment or additional locking device is required. This ensures high repeatable accuracy of the contact probe of the measuring sensor at a given point ( $2\sigma$  not more than 5  $\mu\text{m}$ ).

**HPMA** arm-bracket with electric drive for high-precision automatic tool adjustment. The short delay time when the hand drive is turned on allows you to adjust the tool and determine its failure directly during processing and without operator intervention. The rotation of the arm in its working position and its fixation herewith takes 2 seconds. After setting up the tool, the control program gives the command to return the arm with the sensor to a safe position outside the working area of the machine. The rotating device automatically locks the hand precisely into the socket, ensuring high repeatable accuracy of the sensor location. No adjustment or additional locking device is required. HPMA systems of various standard sizes are available.

# Workpieces measuring systems for CNC lathe machines



Measuring probe RLP40

Renishaw measuring probes can be used to bind the workpiece to the machine coordinate system and control the workpiece during its manufacture on lathe machine. The probe allows you to determine the location of the workpiece relative to the coordinate system of the machine, automatically switch to the coordinate system of the workpiece and, thus, to produce products in accordance with technical requirements from the first attempt.

The probe can also be used to identify work pieces using flexible production systems; to determine the position of the workpiece, as well as to detect its incorrect loading in order to avoid defect; to determine the distribution of machining allowances in order to quickly and safely bring the cutting tool to the workpiece.

In the manufacture of a batch of identical products, the control of the first part directly on the machine allows you to reduce the downtime of the machine, associated with the expectation of the results of the test on the device outside the machine, to automatically correct any errors.

Control within the technological process: measurement of workpiece parameters after pre-treatment to ensure the necessary accuracy of finishing; to identify the errors before they result in the defective products.

Control of the finished part. The probe allows: to make sure that the product meets the specified technical requirements; to obtain the dimensions of the processed products for statistical monitoring of the machining process.

Probes usage on lathes requires the remote transmission of probe signal to the CNC. There are two ways: optical signal transmission (requires direct visibility between the probe and receiver); radio signal transmission (operates at a distance of up to 5 meters from the receiver).



# Machine service maintenance and the customer's personnel training

Sasta pays attention to the issues of service support of the supplied equipment. The company has established a Service Center.

Service center's tasks:

- start-up and adjustment works;
- maintenance service of equipment (medium or small repairs, technical inspection) during the warranty and post-warranty period of the machines;
- training of customer's specialists in operation and maintenance of the machines;
- overhaul and modernization of universal equipment and CNC machines.

## Start-up work and adjustment works

Start-up and adjustment works on the delivered equipment are performed by the specialists of Sasta according to the signed contract provisions.

List of works during commissioning:

- inspection of machine installation and leveling;
- commissioning works in accordance with the standard program and test procedure of the machine or in accordance with the agreed technological process for the customer's parts machining;
- commissioning of the machine.

## Service

Engineers of Sasta go to the place of the equipment operation, diagnose problems, make a defective sheet and a list of necessary spare parts. After delivery of all components we carry out repair of the equipment and we provide a warranty for the performed works.

Repair cost and terms are established after drawing up of the defects sheet and the specification statement for average repair by the customer.

### Warranty service

Warranty service of the machines manufactured by Sasta is carried out within 12 months, in accordance with the supply contract terms.

### After-sales support

Sasta recommends to make an agreement on the after-sales maintenance of metal-working equipment, which can be concluded for a period of 1 to 3 years or more.

## Training

The specialists of Sasta are ready to train the technical personnel of the customer within the frames of the mutually agreed program at Sasta factory or upon the reduced program at the customer's site.

**"Hot line" on the issues of machine operation**  
**+7 (49133) 9-39-64**





391430, Pushkin street, 21  
Sasovo city, Ryazan region,  
Russia  
Purchase department:  
+7 (49133) 9-33-75  
[info@sasta.ru](mailto:info@sasta.ru)

**[WWW.SASTA.RU](http://WWW.SASTA.RU)**

**For order of equipment:**  
+7 (49133) 9-33-38  
+7 (49133) 9-39-59

Baltiyskaya Promishlennaya Kompaniya, AO  
+7 (812) 605-00-33  
[info@bpk-spb.ru](mailto:info@bpk-spb.ru)



MACHINE-TOOL PLANT **SASTA**